

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

This Page Blank (uspto)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G21C 19/48, C22B 60/02, C01G 43/06	A1	(11) International Publication Number: WO 97/27595 (43) International Publication Date: 31 July 1997 (31.07.97)
(21) International Application Number: PCT/GB97/00198 (22) International Filing Date: 23 January 1997 (23.01.97) (30) Priority Data: 9601590.4 26 January 1996 (26.01.96) GB (71) Applicant (for all designated States except US): BRITISH NUCLEAR FUELS PLC [GB/GB]; Risley, Warrington, Cheshire WA3 6AS (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): FIELDS, Mark [GB/GB]; BNFL R & T North, B280, Sellafield Works, Seascale, Cumbria CA20 1PG (GB). (74) Agent: COWKING, Harry; British Nuclear Fuels plc, Patent & IP Dept., Risley, Warrington, Cheshire WA3 6AS (GB).		(81) Designated States: CN, JP, KR, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: FLUORINATION (57) Abstract <p>In the reprocessing of irradiated nuclear fuel, fluorination of the fuel is carried out by feeding the fuel to an ionised gas plasma and then contacting the resultant excited species with a fluorinating agent, for example, fluorine, so as to effect fluorination. The ionised gas plasma is an inductively-coupled plasma or a microwave plasma, and the fuel is fed to the plasma in the form of a slurry or a powder fluidised by a gas. Where the slurry is formed from LWR fuel, a variety of volatile and involatile fission product fluorides and actinide fluorides is produced, so enabling the separation of UF₆ from the involatile fission product fluorides.</p> <div style="text-align: center;"> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

FLUORINATION

This invention relates to fluorination and in particular to the fluorination of irradiated fuel in nuclear fuel reprocessing.

Plant size contributes significantly to the cost of a facility for reprocessing irradiated nuclear fuel. For any process, if one or more of the process stages can be carried out in smaller apparatus and at increased rate, this is likely to lead to considerable cost savings, provided overall throughput is not compromised.

Fluoride volatility reprocessing involves fluorination of irradiated fuel and the subsequent separation of fission product fluorides and actinide fluorides from UF_6 . Fluorination is currently carried out using a fluidised bed to nullify the effect of the highly exothermic fluorination reaction. A large vessel is required and a large volume of highly contaminated fluid bed material is produced, which material ultimately has to be treated and disposed of. Fluorination of all the UO_2 or U_3O_8 and fission products and actinides takes approximately one day per fuel assembly. Accordingly the throughput per fluid bed is limited.

According to the present invention there is provided a fluoride volatility reprocessing procedure in the reprocessing of irradiated nuclear fuel wherein fluorination of the fuel is carried out by feeding the fuel to an ionised gas plasma and contacting the resultant excited species with a fluorinating agent whereby fluorination is affected.

The ionised gas plasma provides a source of intense heat and avoids the need for a fluid bed, allowing the fluorination reaction to be speeded up.

The ionised gas plasma may be, for instance, an inductively-coupled plasma (ICP) or a microwave plasma. In other embodiments of the present invention regions of intense heat may be created by means of a laser or by the use of infra-red light. Reference will be made hereinafter to ICPs but it should be understood that this is by way of example only.

ICPs are commonly used in analytical chemistry for the determination of concentrations of metals in solution. They provide a small and intense source of heat (temperatures up to 10,000 K are routinely achievable) and thus break down all known material to elements and ions. The plasma is created by the application of a radio frequency (rf) field, through a cooled induction coil, to an inert gas such as argon or nitrogen. The gas is ionised and the ions and electrons produced interact with the fluctuating magnetic field produced by the induction coil. Ohmic heating occurs as a consequence of resistance to movement of the ions and electrons and causes the high temperature.

Normally, in analytical applications, solutions containing the species to be analysed are sprayed into the centre of the plasma as an aerosol. In the case of the present invention, however, it has been found possible very efficiently to introduce solids in the form of a slurry into the plasma. A 100% conversion of solids to atoms and ions is readily achievable. Alternatively, a powder fluidised by an inert gas could be supplied to the plasma.

A feedstock of UO_2 and/or U_3O_8 in slurry form when fed to an ICP results in the formation of excited U atoms (U^*). These excited atoms react with a fluorinating (or chlorinating) agent to produce volatile uranium species, such as UF_6 .

In the case where the slurry is formed from irradiated LWR fuel, a variety of volatile and involatile fission product fluorides and actinide fluorides is produced, thereby enabling the separation of UF_6 from the involatile fission product fluorides.

The process of the present invention produces relatively little waste (no bed material waste in contrast of the fluidised-bed process) and the plant volume requirements are small. Furthermore, the process provides rapid chemical conversion of oxide fuel and fission products into separable species. An additional benefit is that the constituent parts of the apparatus are small in size and therefore readily disposable.


The accompanying drawing shows, diagrammatically, apparatus of use in the present invention. The apparatus includes a vessel 1 within which is located an induction coil 3 to the interior of which an inert gas such as argon is fed via tubes 5. Between tubes 5 is located a further tube 7

by which fuel slurry may be fed to a central position within the induction coil. Application of a radio frequency field to the induction coil (which is cooled) results in the formation of an ICP 9, into which the fuel slurry is fed. This results in the formation of excited U atoms (U^*) which pass through an orifice in plate 11 to an upper region of vessel 1 which comprises a fluorinating atmosphere. This atmosphere is typically fluorine gas but may also be provided by another fluorinating agent including a novel reagent such as XeF_2 , KrF_2 , O_2F_2 , HF, BrF_3 or BrF_5 . The UF_6 and other volatile fission products produced by the reaction then pass into a storage tank and ultimately into the plant designed for separation of the fission product fluorides and the actinide fluorides.

CLAIMS

1. A fluoride volatility reprocessing procedure in the reprocessing of irradiated nuclear fuel wherein the fluorination of the fuel is carried out by feeding the fuel to an ionised gas plasma and contacting the resultant excited fuel with a fluorinating agent whereby fluorination is effected.
2. A procedure according to Claim 1 wherein the ionised gas plasma is an ICP or a microwave plasma.
3. A procedure according to Claim 1 or Claim 2 wherein the fuel is fed to the ionised gas plasma in the form of a slurry or a powder fluidised by a gas.
4. A procedure according to any of the preceding claims wherein the fluorinating agent is fluorine.
5. A procedure according to any of the preceding claims wherein the fuel is irradiated LWR fuel.
6. A fluoride volatility reprocessing procedure in the reprocessing of irradiated nuclear fuel substantially as described herein.
7. A procedure according to Claim 1 and substantially as described with reference to the accompanying drawing.

1/1

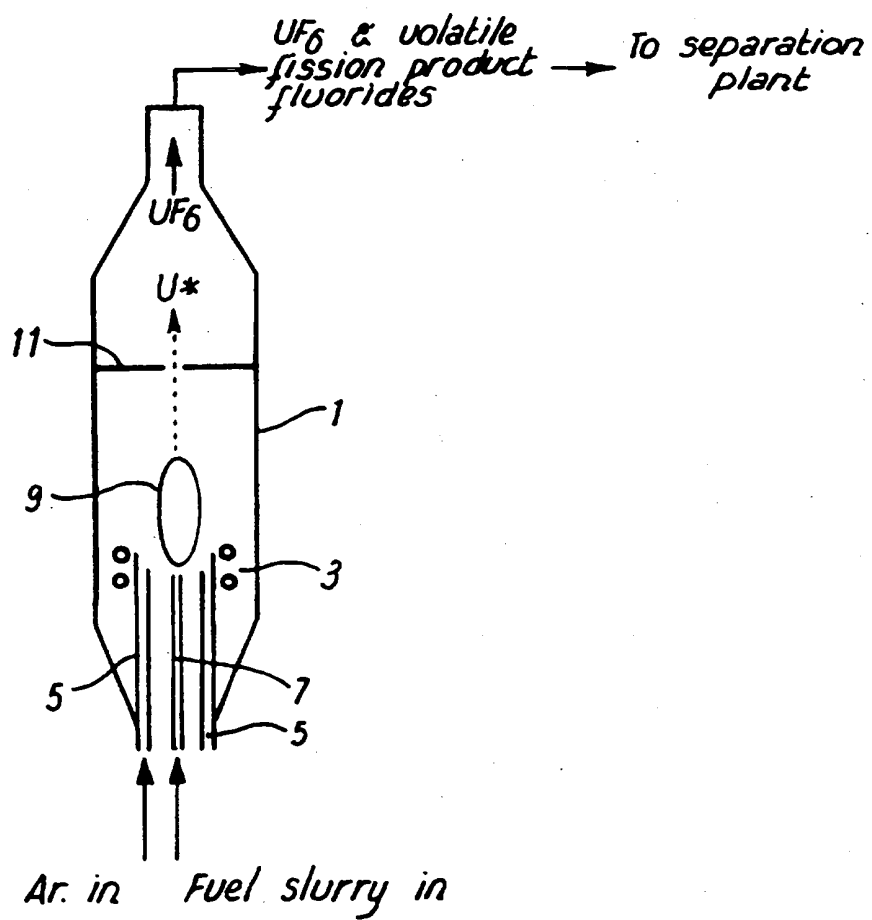

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 97/00198

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G21C19/48 C22B60/02 C01G43/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 G21C C22B C01G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR 1 462 256 A (UNITED STATES ATOMIC ENERGY COMMISSION) 16 December 1966 see the whole document ---	1
A	GB 1 158 287 A (CENTRE D'ÉTUDES DE L'ÉNERGIE NUCLÉAIRE) 16 July 1969 see the whole document -----	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- * "A" document defining the general state of the art which is not considered to be of particular relevance
- * "E" earlier document but published on or after the international filing date
- * "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- * "O" document referring to an oral disclosure, use, exhibition or other means
- * "P" document published prior to the international filing date but later than the priority date claimed

* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* "&" document member of the same patent family

Date of the actual completion of the international search

15 April 1997

Date of mailing of the international search report

24.04.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Brothier, J-A